

School District 85



**North Island Secondary School Shop
2071 McNeill Road, Port McNeill, BC
Asbestos Management Inventory**



**North West
Environmental Group Ltd.**

NWest File: 39957 AMI1 V1.0
Date Issued: November 10, 2020

Report Information

Client Name:	School District 85
Contact:	Darby Gildersleeve
Issued on:	November 10, 2020
NWest File Number:	39957 AMI1.0
NWest Primary Contact:	Daniel Morton

Version Log

Version	Description	Authorized By	Date
V1.0	North Island Secondary School Shop AMI	Joel Shandro	November 10, 2020

Document Sign-Off



Joel Shandro, B.Sc.
Senior Project Manager
Qualified Person as per OHS Regulation 6.1
Review



Daniel Morton, B.Sc., PMP, CVI
Project Manager
Qualified Person as per OHS Regulation 6.1
Review



Paddy Greig, B.Sc.
Occupational Hygiene Technician
Author

Confidentiality and Copyright

This document is for the sole use of the addressee and North West Environmental Group Ltd. (NWest). The document contains confidential information that shall not be reproduced in any manner or disclosed to or discussed with any other parties without the express written permission of NWest. Information in this document is to be considered the intellectual property of NWest in accordance with Canadian copyright law.

This report was prepared by NWest for the account of the above-noted client. The material herein reflects NWest's best judgement, in the light of the information available at the time of preparation. Any third-party use of this report, or any reliance on, or decisions made based on it, are the responsibility of such third parties. NWest accepts no responsibility for damage, if any, suffered by any third party as a result of decisions made or action based on this report.

Table of Contents

Table of Contents	ii
1 Introduction	1
2 Scope of Work and Exclusions	1
3 Regulatory Framework.....	2
4 Facility Description.....	2
5 Asbestos Management Inventory and Recommendations.....	3
6 General Recommendations	6
Appendix A. Photo Plates.....	7
Appendix B. Analytical Reports.....	10
Appendix C. Sample Location Drawings.....	11
Appendix D. Regulatory Framework.....	12
Appendix E. Methodology.....	13
Appendix F. Evaluation of Asbestos-Containing Materials	14

1 Introduction

North West Environmental Group Ltd. (NWest) was retained by School District 85 (the Client) to conduct an asbestos management inventory (AMI) at North Island Secondary School Shop located at 2071 McNeill Road, Port McNeill, BC (site). The non-destructive assessment was conducted by NWest representatives, Luke Kozlowski and Paddy Greig on August 18, 2020.

The purpose of this assessment is to provide information regarding the presence and condition of asbestos and suspect asbestos containing building materials in the building structure. This inventory assessment involved the identification of asbestos containing materials and a condition assessment in support of the building owner/manager's regular monitoring of asbestos containing material conditions so that materials in good condition may be safely managed in place until they are removed, and damaged materials can be repaired or otherwise addressed in a timely manner. Regular inspections of asbestos containing building materials are required to mitigate the potential for occupant and worker exposure. This report may be used for day to day building maintenance activities involving minor disturbance of materials.

This assessment supports compliance with the following provincial legislation:

-) BC Workers Compensation Act – Part 2, Division 4 (General Duties of Employers, Workers and Others), Section 25 (General duties of owner).
-) BC Occupational Health and Safety Regulation – Part 6.4 (Asbestos-General Requirements, Inventory).

This asbestos management inventory assessment does not replace the requirement for the owner to undertake a pre-renovation or pre-demolition project-specific hazardous materials assessment as required by the BC Occupational Health and Safety Regulation section 20.112.

Note: ongoing repairs, maintenance, and renovations may result in some changes to the building after this report was printed.

2 Scope of Work and Exclusions

All accessible areas of the facility were included in this assessment. Whenever practicable, representative building material samples were collected for asbestos analysis. See Appendix E for assessment methodologies.

This assessment was non-destructive (e.g., inspection holes to assess otherwise intact systems such as wall cavities were not made) and non-invasive (e.g., assessment of cupboards, closets, and similar personal spaces were not undertaken; ceiling tiles were not removed to assess above-ceiling materials). As such, concealed asbestos containing materials may be present.

The following NWest historical data and information is included herein:

-) Project number 30639, “Asbestos Inventory and Condition Assessment North Island Secondary School – Shop”, issued on November 10, 2016.

Areas/systems not included in the assessment are summarised in the following table.

Table 2-1. Assessment Exclusions

Area/System	Rationale
Roof	Non-destructive assessment
Attic	Non-destructive assessment
Wall/ceiling cavities	Non-destructive assessment
Concrete block walls	Non-destructive assessment
Equipment/System	Outside assessment scope of work
Underground/buried equipment and systems	Outside assessment scope of work
Indoor air quality assessment	Outside assessment scope of work
Contents	Outside assessment scope of work

3 Regulatory Framework

The methods used for assessment, sample collection, and analysis were in accordance with applicable regulations and are acceptable to WorkSafeBC. See Appendix D for details on the applicable regulatory framework and additional standards that apply to this project.

4 Facility Description

The following is a summary of the building. Area calculations are approximate.

Table 4-1. Building Summary

Building System	Details
Construction date	Original construction: 1966
Number of floors/levels	1
Area	14,230
Exterior Materials	
Roofing	Metal and torch-on asphalt
Exterior	Concrete block and metal
Interior Materials	
Ceiling	Q-deck, drywall, acoustic ceiling tile,
Walls	Concrete block, drywall, plywood
Floors	Concrete, sheet flooring, floor tile
Insulation	Fibreglass
HVAC (system type and insulation type)	Forced air
Lighting	Fluorescent

5 Asbestos Management Inventory and Recommendations

This section summarises the observations made, and the analytical results for material samples collected during the site assessment. Photo plates are presented in Appendix A, analytical laboratory reports are included in Appendix B, and drawings showing sample locations are presented in Appendix C.

The following table summarizes the results of the inventory, condition assessment, and recommended management actions for known and suspect asbestos-containing materials (ACMs). The recommendations are derived by the friability, accessibility, and condition of the ACMs. See Appendix F for details. Quantities are estimated.

Table 5-1. Asbestos-Containing Materials Summary

Description	System	Locations	Status	Quantity	Accessibility	Friability	Condition	Mgmt Recommendation
Floor tile 1 – 12”x12” brown and beige with white streaks	Floor	Autoshop Storage and Hot Water Tank	Suspect	95 ft ²	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Floor tile 2 – 12”x12” brown and beige with black smears	Floor	Autoshop Storage and Hot Water Tank	Suspect	25 ft ²	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Concrete block (may contain vermiculite)	Siding	Exterior	Suspect	All exterior walls	Access A – Accessible to all building users	Friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Concrete block (may contain vermiculite)	Wall	Autoshop Tool Room: 1, 2 Woodshop Wood Storage: 1, 2 Metal Stock Room: 1, 2 Autoshop Main, Autoshop Loading Bay, Autoshop Storage and Hot Water Tank, First Aid Office, Woodshop Classroom, Drafting Classroom, Entrance Hallway, Gentleman’s Washroom, Woodshop Office, Woodshop Storage 3, Woodshop Paint Room, Woodshop, Staff Washroom, Metal Shop, Area Outside Metal Stock Rooms, Metal Shop Office, Metal Shop Tool Room, Metal Shop Fume Hood Room	Suspect	16,500 ft ²	Access A – Accessible to all building users	Friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact



Warning: in the event any additional suspect materials are encountered during renovation/repair activities, work on those materials should stop immediately and remain undisturbed until testing confirms the presence or absence of asbestos or other hazardous material

Description	System	Locations	Status	Quantity	Accessibility	Friability	Condition	Mgmt Recommendation
Drywall with joint compound	Wall	Woodshop Storage: 1, 2, 3 Autoshop Main, Entrance to Woodshop, Autoshop Tool Room 1, Woodshop Classroom, Drafting Classroom, Woodshop, Staff Washroom, Metal Shop Office, Metal Shop Tool Room	Suspect	3,575 ft ²	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Drywall with joint compound	Ceiling	Autoshop Tool Room 1, Metal Shop Office, Metal Shop Tool Room	Suspect	215 ft ²	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Acoustic ceiling tile 1 – Patterned fissure small and large pinhole	Ceiling	Woodshop Storage: 1, 2, 3 Entrance to Woodshop, Woodshop Classroom, Drafting Classroom, Entrance Hallway, Woodshop Office	Suspect	2,250	Access A – Accessible to all building users	Friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Mastic 1 – Gold/silver	Sink	Drafting Classroom	Suspect	1 sink	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Mastic 2 – Off white	Ducting	Woodshop Storage 3, Metal Shop, Metal Shop Fume Hood Room	Suspect	On ducting in locations mentioned	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Mastic 3 – Grey	Ducting	Metal Shop, Exterior	Suspect	On ducting in locations mentioned	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Penetration caulking – White	Wall	Autoshop Loading Bay	Suspect	1 penetration	Access C(e) – Exposed over 8 ft	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Brick and mortar	Floor	Area Outside Metal Stock Rooms, Metal Shop Fume Hood Room	Suspect	395 ft ²	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact
Baseboard adhesive	Wall	Throughout	Suspect	Throughout building	Access A – Accessible to all building users	Non-friable	Good	Action 5 – Proactive ACM removal / Action 7 – Routinely monitor condition Test prior to impact



Warning: in the event any additional suspect materials are encountered during renovation/repair activities, work on those materials should stop immediately and remain undisturbed until testing confirms the presence or absence of asbestos or other hazardous material

Note: asbestos-containing materials may be present in concealed or excluded locations and/or systems. See Section 2 of this report.

Materials suspected to contain asbestos which are often concealed in buildings and require destructive assessment to evaluate may be present which include, but are not limited to:

-) Electrical wiring and cables
-) Buried asbestos cement pipes
-) Formed cement products
-) Bell and spigot piping gaskets
-) Incandescent light fixtures (heat shields)
-) Floor leveling compound
-) Vermiculite in wall cavities including concrete block void spaces
-) Penetration caulking and/or parging

A summary of materials known or presumed not to contain asbestos is presented as follows:

Table 5-2. Non-Asbestos-Containing Materials

Location(s)	Material Description	Sample Quantity	Comments
Autoshop Main, Metal Shop	Paper wrapped fibreglass insulation	0	None
Entrance to Woodshop, Woodshop Classroom, Drafting Classroom, Staff Washroom	Sheet flooring 7 – Beige with dark and white streak pattern	1	None
Entrance Hallway	Sheet flooring 8 – Green streak pattern	1	None
Woodshop Storage: 1, 2, 3 Gentleman’s Washroom, Ladies Washroom	Sheet flooring 9 – Yellow with brown streak pattern	1	None

Materials assumed not to contain asbestos include:

-) post-1990 construction materials with the exception of formed cement products, vermiculite, fire stop caulking, gaskets.
-) wood and wood composite materials
-) carpet
-) plastics in non-industrial applications
-) metals
-) glazing
-) exterior below-grade drainage and plumbing systems
-) ceramic tile, excluding adhesives, grout, and thinset mortar

6 General Recommendations

Based on observations made and analytical results, NWest makes the following recommendations.

1. Ensure that the inventory is kept current with respect to presence and condition of asbestos-containing materials, and a record is kept of any changes made to the inventory.
2. Retain a current version of the inventory until all the asbestos-containing materials are removed from the Site.
3. Ensure that a copy of the current version of the inventory is readily available at the Site.
4. Ensure that all asbestos-containing materials present at the Site are identified by signs, labels or, when these are not practicable, other effective means.
5. A qualified person must undertake a pre-renovation/demolition project-specific hazardous materials assessment prior to planned work other than minor maintenance activities that impacts building materials or systems that conforms to the requirements of the BC Occupational Health and Safety Regulation section 20.112. A qualified person must complete a risk assessment and safe work procedures for all hazardous materials that may be impacted by maintenance and/or renovation work. Removal or disturbance of hazardous materials must be undertaken by a qualified contractor employing WorkSafeBC-approved procedures.
6. Maintenance work must STOP if previously unidentified suspected hazardous materials are encountered or inadvertently damaged or disturbed during maintenance activities. These suspect materials must be left undisturbed until a qualified person has determined the status of the material.
7. Damage to asbestos-containing materials must be repaired or otherwise rendered non-hazardous to unprotected workers and occupants without delay (e.g. enclose damaged materials with a dust barrier).

Appendix A. Photo Plates

The following photo plates provide a general documentation of the building materials that were sampled and analyzed, and observations made during the assessment. They are meant to summarize the results of analysis and observations and are not intended to include all hazardous materials, or their locations, observed during the assessment.



Photo 1
Description: Floor tile 1 – 12"x12" brown and beige with white streaks
Location: Autoshop Storage and Hot Water Tank
Asbestos: Suspect



Photo 2
Description: Floor tile 2 – 12"x12" brown and beige with black smears
Location: Autoshop Storage and Hot Water Tank
Asbestos: Suspect



Photo 3
Description: Concrete block (may contain vermiculite)
Location: Woodshop Office
Asbestos: Suspect



Photo 4
Description: Drywall with joint compound
Location: Entrance to Woodshop
Asbestos: Suspect



Photo 5
Description: Mastic 1 – Gold/silver
Location: Drafting Classroom
Asbestos: Suspect



Photo 6
Description: Mastic 2 – Off white
Location: Metal Shop Fume Hood Room
Asbestos: Suspect



Photo 5
Description: Mastic 3 – Grey
Location: Exterior
Asbestos: Suspect



Photo 6
Description: Penetration caulking – White
Location: Autoshop Loading Bay
Asbestos: Suspect



Photo 5
Description: Brick and mortar
Location: Area Outside Metal Stock Rooms
Asbestos: **Suspect**



Photo 6
Description: Baseboard adhesive
Location: Ladies Washroom
Asbestos: **Suspect**



Photo 5
Description: Acoustic ceiling tile 1 – Patterned
fissure small and large pinhole
Location: Woodshop Classroom
Asbestos: **Suspect**

Appendix B. Analytical Reports



Bulk Samples Report

Asbestos Analysis of Bulk Materials using Polarized Light Microscopy

Client: School District 85 - Vancouver Island North

Date: September 16, 2020

Contractor: School District 85 - Vancouver Island North

Purchase Order: 28285

Project: Asbestos Inventory SD 85 Schools

Project Number: 39957

Sample No.	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
39957-1b	NISS - Exterior Main Entrance Stairs	Sep 15, 2020	BR	Caulking (Grey)	Grey	100	None Detected	0	Non-Fibrous	100	
39957-2b Layer 1	NISS - Room 100	Sep 15, 2020	BR	Sheet Floor 2 Mastic (Brown)	Wear Surface- Light Grey/Dark Grey	45	None Detected	0	Non-Fibrous	100	
39957-2b Layer 2	NISS - Room 100	Sep 15, 2020	BR	Sheet Floor 2 Mastic (Brown)	Paper Backing - White	45	None Detected	0	Synthetic (65%) Non-Fibrous (35%)	100	
39957-2b Layer 3	NISS - Room 100	Sep 15, 2020	BR	Sheet Floor 2 Mastic (Brown)	Adhesive - Brown	10	None Detected	0	Non-Fibrous	100	
39957-3b	NISS - Room 103	Sep 15, 2020	BR	Ceiling Tile (Acoustic) - ACT 1 Patterned Fissure	Grey/White	100	None Detected	0	Cellulose (36%) Glass (36%) Non-Fibrous (28%)	100	
39957-4b	NISS - Hallway 4	Sep 15, 2020	BR	Ceiling Tile (Acoustic) - ACT 1 Patterned Fissure	Grey/White	100	None Detected	0	Cellulose (36%) Glass (36%) Non-Fibrous (28%)	100	
39957-5b	NISS - Hallway 4	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-6b	NISS - Staff Room (Adj. Hallway 4)	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-7b	NISS - Room 108	Sep 15, 2020	BR	Sink Mastic/Coating (Beige)	Beige	100	None Detected	0	Non-Fibrous	100	
39957-8b	NISS - Room 103 Wall	Sep 15, 2020	BR	Exposed Adhesive (Grey)	Grey	100	None Detected	0	Non-Fibrous	100	
39957-9b Layer 1	NISS - Janitor Closet (Adj. Hallway 4)	Sep 15, 2020	BR	Pipe Elbow Insulation	Pipe Wrap - Off White	10	None Detected	0	Cellulose (78%) Non-Fibrous (22%)	100	
39957-9b Layer 2	NISS - Janitor Closet (Adj. Hallway 4)	Sep 15, 2020	BR	Pipe Elbow Insulation	Pipe Insulation - Off White	90	Chrysotile (26%) Amosite (4%)	30	Cellulose (11%) Non-Fibrous (59%)	70	
39957-10b	NISS - Drama Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	



Sample No.	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
39957-11b	NISS - Room 319	Sep 15, 2020	BR	Baseboard Adhesive	Yellow	100	None Detected	0	Non-Fibrous	100	
39957-12b Layer 1	NISS - Basement Storage Room	Sep 15, 2020	BR	Pipe fitting insulation	Pipe Wrap - Off White	10	None Detected	0	Cellulose (78%) Non-Fibrous (22%)	100	
39957-12b Layer 2	NISS - Basement Storage Room	Sep 15, 2020	BR	Pipe fitting insulation	Pipe Insulation - Off White	90	Chrysotile (26%) Amosite (4%)	30	Cellulose (11%) Non-Fibrous (59%)	70	
39957-13b Layer 1	NISS - Basement Storage Room	Sep 15, 2020	BR	Pipe elbow insulation	Pipe Wrap - Off White	10	None Detected	0	Cellulose (78%) Non-Fibrous (22%)	100	
39957-13b Layer 2	NISS - Basement Storage Room	Sep 15, 2020	BR	Pipe elbow insulation	Pipe Insulation - Off White	90	Chrysotile (26%) Amosite (4%)	30	Cellulose (11%) Non-Fibrous (59%)	70	
39957-14b	NISS - Drama Room	Sep 15, 2020	BR	Baseboard Adhesive	Tan	100	None Detected	0	Non-Fibrous	100	
39957-15b Layer 1	NISS - Janitor Closet (Adj. Hallway 8)	Sep 15, 2020	BR	Pipe run insulation	Pipe Wrap - Silver/White	25	None Detected	0	Cellulose (36%) Glass (28%) Non-Fibrous (36%)	100	
39957-15b Layer 2	NISS - Janitor Closet (Adj. Hallway 8)	Sep 15, 2020	BR	Pipe run insulation	Insulation - Yellow	75	None Detected	0	Glass	100	
39957-16b	NISS - Basement Crawlspace Foundation Wall	Sep 15, 2020	BR	Tar Paper	Black	100	None Detected	0	Cellulose (58%) Non-Fibrous (42%)	100	
39957-17b Layer 1	NISS - Basement Crawlspace	Sep 15, 2020	BR	Pipe run insulation with black mastic	Pipe Wrap - Silver/Black/White	80	None Detected	0	Cellulose (35%) Non-Fibrous (65%)	100	
39957-17b Layer 2	NISS - Basement Crawlspace	Sep 15, 2020	BR	Pipe run insulation with black mastic	Mastic - Black	20	None Detected	0	Non-Fibrous	100	
39957-18b	NISS - Storage Room (Adj. Hallway 3)	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-19b	NISS Maintenance Shop Building 2 Exterior	Sep 15, 2020	BR	Aggregate Panel beneath Window	Dark Brown/Grey	100	None Detected	0	Non-Fibrous	100	
39957-20b Layer 1	NISS Maintenance Shop Building 1 Room C	Sep 15, 2020	BR	Floor Tile - FT1 9x9 Grey w/White Streaks	Floor Tile - Grey	90	None Detected	0	Non-Fibrous	100	
39957-20b Layer 2	NISS Maintenance Shop Building 1 Room C	Sep 15, 2020	BR	Floor Tile - FT1 9x9 Grey w/White Streaks	Mastic - Black	10	None Detected	0	Non-Fibrous	100	
39957-21b	NISS Shop - Wood Shop Classroom	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-22b	NISS Shop - Wood Shop	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-23b	NISS Shop - Drafting Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-24b	NISS Maintenance Shop Building 1 Mech Room	Sep 15, 2020	BR	Drywall Joint Compound	Off White	100	Chrysotile	1.5	Non-Fibrous	98.5	



Sample No.	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
39957-25b	NISS Maintenance Shop Building 1 Storage Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-26b	NISS Maintenance Shop Building 1 Mech Room	Sep 15, 2020	BR	Floor tile (Unknown Pattern) under plywood	Beige	100	None Detected	0	Non-Fibrous	100	
39957-27b	Cheslakees Mechanical Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-28b	Cheslakees Girls Washroom	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-30b	Sunset Elem. Mezzanine Band Room Janitor Closet	Sep 15, 2020	BR	Ceiling Tile (Acoustic) - CT2 Latitudinal Fissure Small & Large Pinhole	White/Grey	100	None Detected	0	Cellulose (36%) Glass (36%) Non-Fibrous (28%)	100	
39957-31b Layer 1	A.J. Elliott Exterior	Sep 15, 2020	BR	Stucco	Top Coat - White	50	None Detected	0	Non-Fibrous	100	
39957-31b Layer 2	A.J. Elliott Exterior	Sep 15, 2020	BR	Stucco	Base Coat - Grey	50	None Detected	0	Non-Fibrous	100	
39957-32b	Alert Bay Learning Centre Janitor Closet	Sep 15, 2020	BR	Floor Tile - FT1 Beige 12x12 w/Brown + White Streaks	Grey	100	None Detected	0	Non-Fibrous	100	
39957-33b	Alert Bay Learning Centre Janitor Closet	Sep 15, 2020	BR	Ceiling Tile (Acoustic) - CT1 2x4 Small and Large Pinholes	Grey/White	100	None Detected	0	Cellulose (36%) Glass (36%) Non-Fibrous (28%)	100	
39957-34b	Alert Bay Learning Centre Storage Rm 2	Sep 15, 2020	BR	Drywall Joint Compound	Off White/Beige	100	None Detected	0	Non-Fibrous	100	
39957-35b	Alert Bay Learning Centre Storage Rm 2	Sep 15, 2020	BR	Baseboard Adhesive (Brown)	Brown	100	None Detected	0	Non-Fibrous	100	
39957-36b	Alert Bay Learning Centre Girls Washroom Corridor	Sep 15, 2020	BR	Window Putty (Black)	Black	100	Chrysotile	11	Non-Fibrous	89	
39957-37b	83 McRae Drive: Exterior Window	Sep 15, 2020	BR	Window Putty (White)	White	100	None Detected	0	Non-Fibrous	100	
39957-38b Layer 1	86 McRae Drive Hallway	Sep 15, 2020	BR	Sheet Flooring - SF2 Brown Hexagonal Mosaic	Wear Surface - Light Brown/Dark Brown	50	None Detected	0	Non-Fibrous	100	
39957-38b Layer 2	86 McRae Drive Hallway	Sep 15, 2020	BR	Sheet Flooring - SF2 Brown Hexagonal Mosaic	Paper Backing - Off White	50	Chrysotile	35	Non-Fibrous	65	
39957-39b	Tacan Maintenance Offices and Shop Exterior Wall	Sep 15, 2020	BR	Caulking (White) on Vents	White	100	None Detected	0	Non-Fibrous	100	
39957-40b	PHSS - Room 338	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-41b	PHSS - Gym Mezzanine Stairwell	Sep 15, 2020	BR	Stair Tread (Red)	Red	100	None Detected	0	Non-Fibrous	100	



Sample No.	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
39957-42b Layer 1	PHSS - Gym Mezzanine Stairwell	Sep 15, 2020	BR	Baseboard Adhesive (Yellow) + DW Joint Compound	Baseboard Adhesive - Brown	50	None Detected	0	Non-Fibrous	100	
39957-42b Layer 2	PHSS - Gym Mezzanine Stairwell	Sep 15, 2020	BR	Baseboard Adhesive (Yellow) + DW Joint Compound	Drywall Joint Compound - White	50	None Detected	0	Non-Fibrous	100	
39957-43b	PHSS - Room 400	Sep 15, 2020	BR	Baseboard Adhesive (White)	Off White	100	None Detected	0	Non-Fibrous	100	
39957-44b	Quatsino Elementary - Storage Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-45b	Quatsino Elementary - Exterior Stairs	Sep 15, 2020	BR	Stair Tread (Asphalt)	Black/Grey	100	None Detected	0	Synthetic (35%) Non-Fibrous (65%)	100	
39957-46b Layer 1	Quatsino Elementary - Classroom	Sep 15, 2020	BR	Floor Tile - FT1 Beige 9x9 w/Red, Green, + Yellow Streaks	Wear Surface - Beige/Green/Red	50	None Detected	0	Cellulose (18%) Non-Fibrous (82%)	100	
39957-46b Layer 2	Quatsino Elementary - Classroom	Sep 15, 2020	BR	Floor Tile - FT1 Beige 9x9 w/Red, Green, + Yellow Streaks	Asphalt Paper Backing - Black	50	None Detected	0	Synthetic (14%) Cellulose (38%) Non-Fibrous (48%)	100	
39957-47b	School Board Office Lower Level Main Room	Sep 15, 2020	BR	Window Putty (Black)	Black	100	Chrysotile	12	Non-Fibrous	88	
39957-48b	School Board Office Copy Room	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-49b	School Board Office Lower Level North Exit/Entry	Sep 15, 2020	BR	Drywall Joint Compound	White	100	None Detected	0	Non-Fibrous	100	
39957-50b	School Board Office Interior Stairs	Sep 15, 2020	BR	Stair Tread (Brown/Red)	Red/Brown	100	None Detected	0	Non-Fibrous	100	
39957-51b	Seaview Activity Centre - Room 2 Window	Sep 15, 2020	BR	Window Putty (Black)	Black	100	Chrysotile	12	Non-Fibrous	88	
39957-52b Layer 1	Seaview Activity Centre - Janitor Room	Sep 15, 2020	BR	Pipe Wrap with Black Mastic	Pipe Wrap - Silver/Black	80	None Detected	0	Cellulose (35%) Non-Fibrous (65%)	100	
39957-52b Layer 2	Seaview Activity Centre - Janitor Room	Sep 15, 2020	BR	Pipe Wrap with Black Mastic	Mastic - Black	20	None Detected	0	Non-Fibrous	100	
39957-53b	Seaview Carpentry Shop Storage Room B	Sep 15, 2020	BR	Vermiculite Insulation	Silver/Grey/Brown	100	Actinolite	0.5	Cellulose (4%) Non-Fibrous (95.5%)	99.5	
39957-54b	Seaview Secondary School - Room 5	Sep 15, 2020	BR	Window Putty (Black)	Black	100	None Detected	0	Cellulose (8%) Synthetic (8%) Non-Fibrous (84%)	100	
39957-55b	Seaview Secondary School - Room 4	Sep 15, 2020	BR		Dark Brown	100	None Detected	0	Non-Fibrous	100	
39957-56b	Seaview Elementary - Girls Washroom	Sep 15, 2020	BR	Cement Board	Off White/Grey/Green	100	Chrysotile	31	Non-Fibrous	69	



Sample No.	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
39957-57b	Eagle View Elem. - Gym Stairs	Sep 15, 2020	BR	Mastic - FT3 Mastic (Black)	Black	100	None Detected	0	Non-Fibrous	100	
39957-58b	Eagle View Elem. - Gym Storage Room	Sep 15, 2020	BR	Mastic - FT3 Mastic (Black)	Black	100	None Detected	0	Non-Fibrous	100	

Bulk asbestos analysis was conducted using calibrated visual estimation in conjunction with polarized light microscopy as detailed in EPA method 600/R-93/116. Sample(s) not destroyed in the testing will be kept for 30 days before disposal.

Note that EPA 600-R93-116 is not an acceptable method for quantifying asbestos concentrations that are lower than 0.5%.

The report shall not be reproduced except in full without written approval of NWest. The report must not be used by the customer to claim product certification, approval, or endorsement by AIHA, EPA, NWest or its employees.



LAB# 202314



201 - 415 Gorge Road East
Victoria, BC V8T 2W1

Tel: (250) 384-9695
Fax: (250) 384-9865
e-mail: northwest@nwest.bc.ca

Bulk Sample Report

Asbestos Analysis of Bulk Materials using Polarized Light Microscopy

Client: School District 85 - Vancouver Island North
Contractor: School District 85 - Vancouver Island North
Project: North Island Secondary -SHOP AB Inventory

Date: September 08, 2016
Client Job or PO#:
Project number: 30639

Sample No	Location	Date Analysed	Analyst	Client Description	Phase	%	Asbestos	%	Other Materials	%	Comments
30639-1 Layer 1	Drafting	Sep-05-2016	IATL	Sheet Flooring - SF7- Beige with Dark and White Streak Pattern	Sheet Flooring - Tan/ Yellow	50	None Detected	0	Cellulose (60%) Non-Fibrous (40%)	100	
30639-1 Layer 2	Drafting	Sep-05-2016	IATL	Sheet Flooring - SF7- Beige with Dark and White Streak Pattern	Mastic - Yellow	50	None Detected	0	Non-Fibrous	100	
30639-2	Hall Drafting	Sep-05-2016	IATL	Sheet Flooring - SF8- Green Streak Pattern	Green/ Blue	100	None Detected	0	Non-Fibrous	100	
30639-3	Woodshop	Sep-05-2016	IATL	Drywall Joint Compound - White Cementitious	White	100	None Detected	0	Non-Fibrous	100	
30639-4 Layer 1	Wood Shop Office "D"	Sep-05-2016	IATL	Sheet Flooring - SF 9 - Yellow with Brown Streak Pattern	Sheet Flooring - Yellow/ Tan	50	None Detected	0	Non-Fibrous	100	
30639-4 Layer 2	Wood Shop Office "D"	Sep-05-2016	IATL	Sheet Flooring - SF 9 - Yellow with Brown Streak Pattern	Mastic - Yellow	50	None Detected	0	Non-Fibrous	100	

Note: Samples were analyzed by method: EPA/600/R-93/116" Bulk Asbestos Analysis by Polarized Light Microscopy". For heterogenous materials the concentration may vary. No reproduction without permission.




LAB# 202314

Appendix C. Sample Location Drawings



Location: NISS Maintenance Shop,
2071 McNeill Road, Port McNeill,
BC
Drawing Title: Sample Locations
Project No: 39957
Drawing No: 001
Surveyed By: PG & LK
Survey Date: August 18, 2020

21b	Drywall Joint Compound
22b	Drywall Joint Compound
23b	Drywall Joint Compound

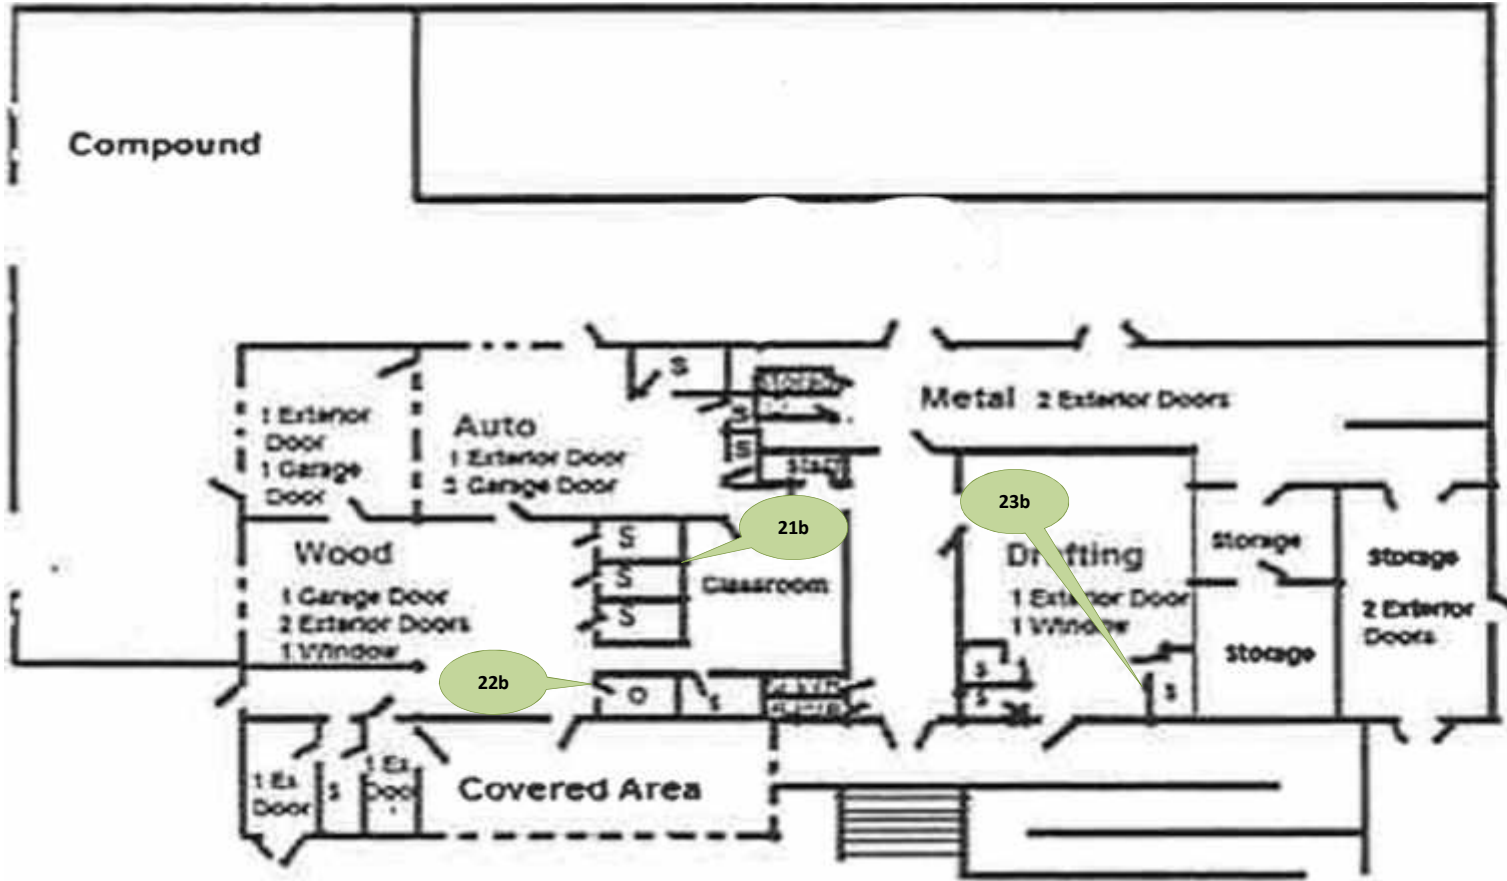

Sample Results



Asbestos Not
Detected



Material Contains
Asbestos

Appendix D. Regulatory Framework

1. **Workers Compensation Act**, Part 2, Division 4 (General Duties of Employers, Workers and Others), Section 25 (General duties of owner).
2. **BC Occupational Health and Safety Regulation**, BC Reg. 296/97, including amendments.
3. **Safe Work Practices for Handling Asbestos**, WorkSafeBC, current edition.
4. **Hazardous Waste Regulation**, BC Ministry of Environment, including amendments.
5. **Transportation of Dangerous Goods Regulations SOR / 2008-34**, Transportation of Dangerous Goods Act, SOR/2008/34 including amendments.

Appendix E. Methodology

The assessment adhered to applicable regulations and followed industry-accepted standards and methodologies.

Note: Not all of the following materials and/or methods were necessarily included in this assessment.

Asbestos

An initial walk-through was conducted of the assessment areas for building materials and machinery or equipment to make a preliminary determination if asbestos could be present.

To confirm or discount the presence of asbestos, representative bulk samples were collected. The sample locations in the building are identified with a unique sample number. Whenever practicable, a representative number of material samples were collected as per WorkSafeBC guidance. Some materials could not be representatively sampled due to accessibility or if sample collection would damage the remaining material.

Bulk samples were submitted for analysis in accordance with the following method: EPA 600 R-93 / 116-1993. Samples consisting of greater than 0.5% asbestos were reported as an asbestos-containing material as per WorkSafeBC. See Appendix G for details on how asbestos-containing materials are evaluated to determine management actions.

Vermiculite samples were submitted for analysis in accordance with the Research Method for Sampling and Analysis of Fibrous Amphibole in Vermiculite Attic Insulation (EPA/600/R-04/004, January 2004, US EPA.) Samples of loose fill vermiculite insulation found to contain any trace of asbestos were reported as

Appendix F. Evaluation of Asbestos-Containing Materials

Evaluation of asbestos-containing materials (ACMs) is based on the condition of the material, its accessibility, and its friability. The following are guidelines used to evaluate ACMs and the action, if any, required to safely manage them.

Spray Applied Fireproofing, Insulation and Texture Finishes

In evaluating the condition of ACM spray applied as fireproofing, thermal insulation or texture, decorative or acoustic finishes, the following criteria apply.

GOOD	Surface of material shows no significant signs of damage, deterioration or delamination. Up to one percent visible damage to surface is allowed within range of GOOD. Evaluation of sprayed fireproofing requires the assessor to be familiar with the irregular surface texture typical of sprayed asbestos products. GOOD condition includes un-encapsulated or unpainted fireproofing or texture finishes, where no delamination or damage is observed, and encapsulated fireproofing or texture finishes where the encapsulation has been applied after the damage or fallout occurred.
POOR	Sprayed materials show signs of damage, delamination or deterioration. More than one percent damage to surface of ACM spray.
DEBRIS	Spray materials are dislodged from surface application source. The identified debris is noted as being separated from the original source.

Mechanical Insulation

In evaluating the condition of mechanical insulation (on boilers, breeching, ductwork, piping, tanks, equipment etc.) the following criteria are used.

GOOD	Insulation is completely covered in jacketing and exhibits no evidence of damage or deterioration. No insulation is exposed. Includes conditions where the jacketing has minor surface damage (i.e., scuffs or stains), but the jacketing is not penetrated.
FAIR	Minor penetration damage to jacketed insulation (cuts, tears, nicks, deterioration or delamination) or undamaged insulation that has never been jacketed. Insulation is exposed but not showing surface disintegration. The extent of missing insulation should be minor to none.
POOR	Original insulation jacket is missing, damaged, deteriorated or delaminated. Insulation is exposed and significant areas have been dislodged. Damage cannot be readily repaired.
DEBRIS	Insulation materials are dislodged from surface application source. The identified debris is noted as being separated from the original source.

Non-Friable and Potentially Friable Materials

Non-friable materials generally have little potential to release airborne fibres, even when damaged by mechanical breakage. However, some non-friable materials, i.e., exterior asbestos concrete products, may have deteriorated so that the binder no longer effectively contains the asbestos fibres. In such cases of significantly deteriorated non-friable material, the material will be treated as a friable product.

Accessibility

The accessibility of building materials known or suspect of being ACM is rated according to the following criteria.

Access (A)	Areas of the building within reach (from floor level) of all building users. Includes areas such as gymnasiums, workshops, and storage areas where activities of the building users may result in disturbance of ACM not normally within reach from floor level.
-------------------	--

Access (B)	Frequently entered maintenance areas within reach of maintenance staff, without need for a ladder. Includes: frequently entered pipe chases, tunnels and service areas or areas within reach from a fixed ladder or catwalk (e.g., tops of equipment, mezzanines).
Access (C) Exposed	Areas of the building above 2.5 metres where use of a ladder is required to reach the ACM. Only refers to ACM materials that are exposed to view, from the floor or ladder, without removing or opening other building components such as ceiling tiles, or service access doors or hatches. Does not include infrequently accessed service areas of the building.
Access (C) Concealed	Areas of the building which require removal of a building component including lay-in ceilings and access panels into solid ceiling systems. Includes rarely entered crawlspaces, attic spaces etc. Observations are limited to the extent visible from the access points.
Access (D)	Areas of the building behind inaccessible solid ceiling systems, walls, or mechanical equipment, etc., where demolition of the ceiling, wall or equipment etc., is required to reach the ACM. Evaluation of condition and extent of ACM is limited or impossible, depending on the assessor's ability to visually examine the materials in Access D.
ACM in Plenum	Areas of the building where air movement through open or closed air spaces or plenums can be accesses by Access X, where X is any of the Accesses A-D, inclusive.

Action Matrix

The following Action Matrix determines what, if any, action is required to safely manage ACMs.

Access	Condition			
	Good	Fair	Poor	Debris
(A)	Action 5/7	Action 5/6	Action 3	Action 1
(B)	Action 7	Action 6/5	Action 3	Action 1
(C) Exposed	Action 7	Action 6	Action 4	Action 2
(C) Concealed	Action 7	Action 7	Action 4	Action 2
(D)	Action 7	Action 7	Action 7	Action 7
(X)	Action 5/7	Action 5/6	Action 3	Action 1

Action Table

The following is a description of the action required to manage ACMs, based on the outcome of the evaluation.

Action 1	Immediate Clean Up of Debris That is Likely to be Disturbed Restrict access/shut off air handling system if disturbance of the ACM DEBRIS is likely, and clean up ACM DEBRIS immediately. Utilize proper asbestos procedures. This action is required for compliance with regulatory requirements.
Action 2	Entry into Areas with ACM Debris At locations where ACM DEBRIS can be isolated in lieu of removal or clean up, use appropriate means to limit entry to the area. Restrict access to the area to persons utilizing moderate risk asbestos-work precautions. The precautions will be required until the ACM DEBRIS has been cleaned up, and the source of the DEBRIS has been stabilized or removed.
Action 3	ACM Removal Required for Compliance Remove ACM for compliance with regulatory requirements. Utilize asbestos procedures appropriate to the scope of the removal work.
Action 4	Access into Areas Where ACM is Present and Likely to be Disturbed by Access Use asbestos precautions when entry or access into an area is likely to disturb the ACM. ACTION 4 must be used until the ACM is removed (Use ACTION 1 or 2 if DEBRIS is present).
Action 5	Proactive ACM Removal

	Remove ACM in lieu of repair, or at locations where the presence of asbestos in GOOD condition is not desirable.
Action 6	ACM Repair Repair ACM found in FAIR condition, and not likely to be damaged again or disturbed by normal use of the area or room. Upon completion of the repair work, treat ACM as material in GOOD condition and implement ACTION 7. If ACM is likely to be damaged or disturbed during normal use of the area or room, implement ACTION 5.
Action 7	Routine Surveillance Institute routine surveillance of the ACM. Trained workers or contractors must use appropriate asbestos precaution during disturbance of the remaining ACM.

End of report. This page intentionally left blank.